
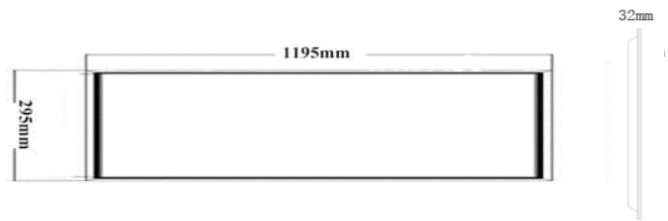



120x30 LED Panel Lights Backlit

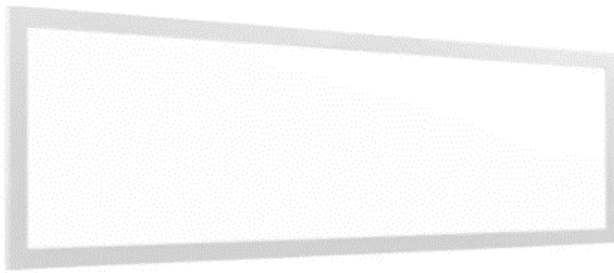

Feature

1. Long lifespan. Lifetime > 50000 Hrs.
2. High lumens output. 100-120lm/W output
3. LiFud, DONE, GS, Boke, Eagleries driver options etc.
4. Anti-UV LGP, avoiding any turn yellows.
5. Triac/0-10V/DALI Dimmable option.
6. Surface/recessed/suspension installation available.
7. Warranty 2-3 Years optional.
8. CE RoHS LVD EMC Approval.
9. AC110V 220V DC12V 24V 48V Input option
10. Power 48W can be done if needed.
11. Emergency kit options.

Light Distribution curve

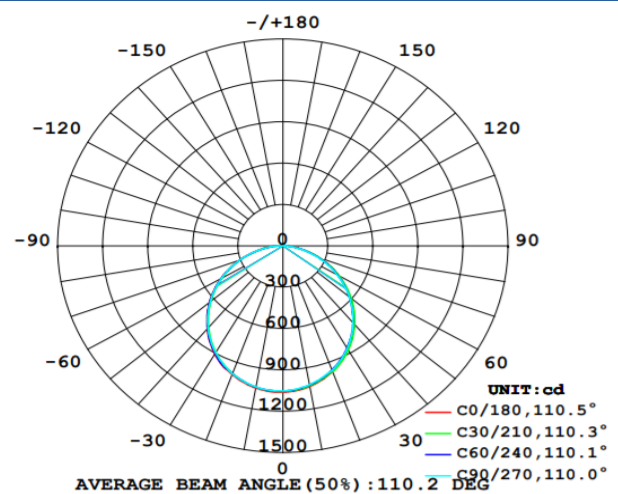

Specification

| | |
|----------------------|--|
| Model | GR-PL12030-40WD |
| Power | 40W |
| Dimension | 1195*295*32mm |
| LED Chips Quantities | 48pcs |
| LED Chips brand | Epistar SMD 2835 |
| Lumens | 4000lm |
| Color temperature | 3000K-6500K |
| Input voltage | AC100-240VAC; DC12V 24V 48V can be customized |
| Output | 38.2DC 1000mA |
| Power factor | >0.9 |
| CRI | 80% |
| Dimmable | No. But Triac/0-10V/DALI dimmable can be available |
| Materials | Die-cast aluminum+diffuser plate. White/Silver frame options |
| Beam angle | 110-120° |
| Working life | 50000Hrs |
| Certificates | CE RoHS LVD EMC |
| Warranty | 2-3Years |
| Remark | Emergency kit available(duration 3hours for power 12W-18W) |
| Package | 6pcs/CTNS/12.5KG |
| CTNS Size | 1270x260x330mm |