


# AC110V 220V Magnetic track lighting system

Grnled



## Feature

- 1.AC100-240VAC input, No need to be with power supply.
- 2.Freely combine to form different shapes.
- 3.Die-cast aluminum body, good heat performance.
4. Bridgelux COB, CRI90. And Osram SMD3030 CRI80
- 5.Triac/0-10V/DALI Dimmable option.
- 6.Accessories can be provided.
- 7.Warranty 2-3Years optional.
- 8.CE RoHS LVD EMC Approval.
- 9.Working life up to 50000Hrs,
- 10.Different beam angle 15/24/38/120° options.
- 11.Unlimited splicing, free sliding.

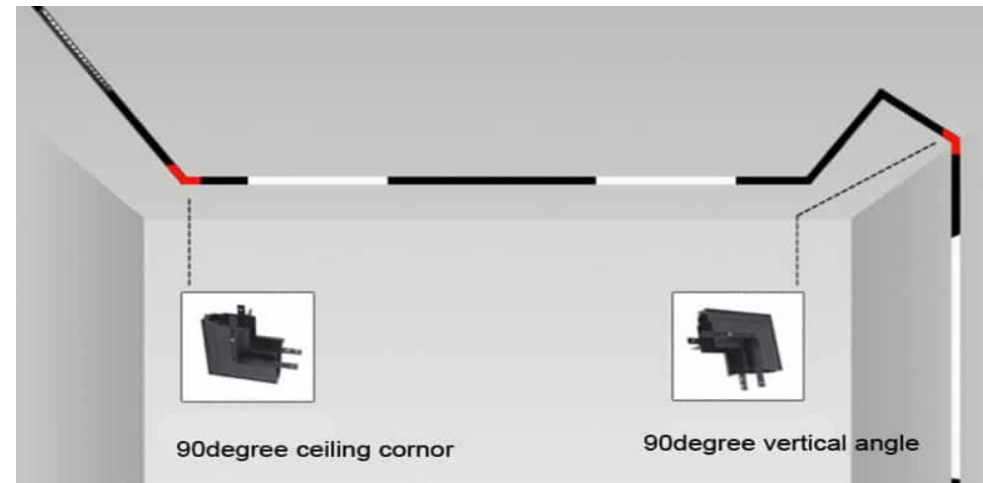

## AC110V 220V Magnetic track lighting system

Photo	Model	Power	Dimension (mm)	LED	Beam angle	Lumens	CRI
	GR-MLL-8WSH	8W	138*34*58	Osram	24° 38°	90lm/W	80
	GR-MLL-15WSH	15W	270*34*58				
	GR-MLL-20WSH	20W	402*34*58				
	GR-MLL-8WLH	8W	138*34*58	Osram	120°	90lm/W	80
	GR-MLL-15WLH	15W	270*34*58				
	GR-MLL-20WLH	20W	402*34*58				
	GR-MLL-8WE	8W	138*34*58	Osram	120°	90lm/W	80
	GR-MLL-15WE	15W	270*34*58				
	GR-MLL-20WE	20W	402*34*58				
	GR-MLL-8WFH	8W	138*34*150	Osram	24° 38°	90lm/W	80
	GR-MLL-15WFH	15W	270*34*150				
	GR-MLL-9WTH	9W	60*100*138	Bridgelux	24° 38°	90lm/W	90
	GR-MLL-18WTH	18W	60*140*138				
	GR-MLL-9WPH	10W	60*100*138	Bridgelux	24° 38°	90lm/W	90
	GR-MLL-18WPH	12W	60*100*138				