



A Series Recessed Downlighter



Grnled

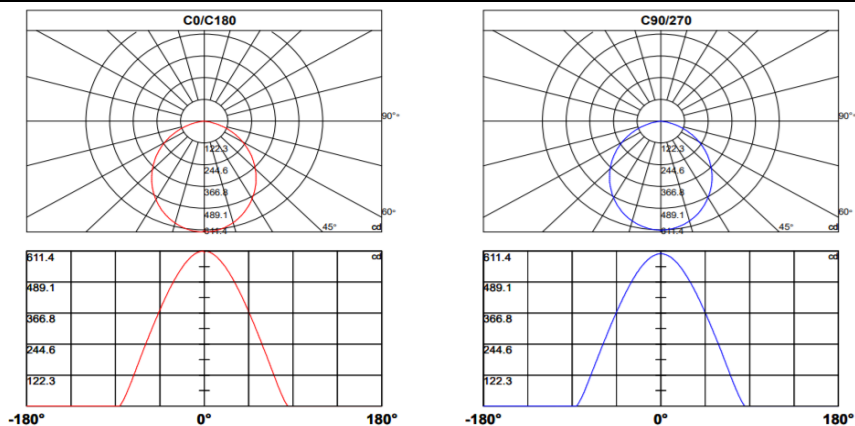

Feature

1. Free sample to test quality.
2. Top led driver, isolated, Free flicker.
3. Lifetime > 5 years at least
4. CE RoHS LVD EMC

Option

1. Emergency kits (1- 3 hours duration)
2. Triac/0-10V/DALI dimmable

Specification

Model	GR-DL-7WA	GR-DL-9WA	GR-DL-12WA	GR-DL-15WA	GR-DL-18WA	GR-DL-24WA
Power	7W	9W	12W	15W	18W	30W
Dimension	Ø106xH45mm	Ø115xH45mm	Ø143xH55mm	Ø180xH55mm	Ø195xH60mm	Ø227xH70mm
Outcut	Ø75-80mm	Ø90-95mm	Ø120-125mm	Ø160-165mm	Ø170-175mm	Ø195-200mm
Led chips	Samsung/Epistar SMD LED Chips					
Lumens output	90lm/W					
Color temperature	3000K WW; 4000-4500K NW ; 6000-6500K CW;					
Input voltage	AC100-240VAC; The low voltage such as DC12V 24V 48V can be customized					
Control gear	Included					
Power factor	>0.6/0.9					
CRI	>82					
IP Grade	IP20 Indoor use only					
Materials	Die-cast aluminum					
Beam angle	120°					
Working temperature	-25°C ~ +50°C					
Certificates	CE RoHS LVD EMC					