


Feature

1. Long lifespan. Lifetime > 50000 Hrs.
2. High lumens output. 90lm/W output
3. DONE Isolated driver, Free flicker.
4. Different height can be customized.
5. Metal body, Grey/Black options.
6. AC100-240V or DC12V 24V 48V option.
7. IP65 Waterproof outdoor use.
8. Comply with CE RoHS LVD EMC.

Light Distribution curve

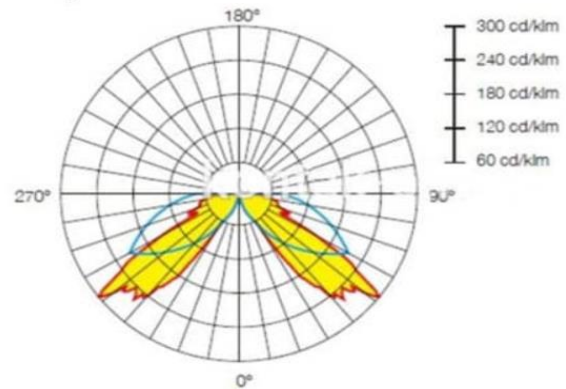

Specification

Model	GR-BL03R (Round)	GR-BL03S (Square)
Power	7W-12W for <1200mm; 15W-30W for H>2000mm	
Dimension	Diameter: Φ108/150/200mm; height standard: 600/800/1000/2000/3000mm.	
LED Chips Type	SMD/COB	
LED Chips brand	Epistar / Bridgelux	
Lumens	810lm	
Color temperature	3000K-6500K	
Input voltage	AC100-240VAC; DC12V 24V 48V can be customized	
Driver	Built-in driver, isolated, safety and stable	
Power factor	>0.6	
CRI	80%	
IP Grade	IP65 Waterproof	
Materials	Metal body 2.0mm thickness. Grey/Black frame options	
Beam angle	120°	
Dimmable	No. But triac dimmable available if needed.	
Standard	Comply with CE RoHS LVD EMC	
Working temperature	-25°C ~ +50°C	
Working life	50000 Hrs	