
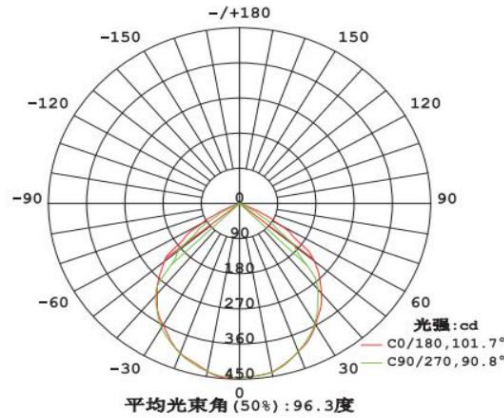


D Series Down light



Feature

1. Anti-glare design, UGR<19.
2. Top led driver, isolated, Free flicker.
3. Lifetime>10years
4. CE RoHS LVD EMC

Option

1. Emergency kits (1- 3hours duration)
2. Triac/0-10V/DALI dimmable

Specification

Model	GR-DL-7/9WD	GR-DL-12WD	GR-DL-15WD	GR-DL-18WD	GR-DL-24WD	GR-DL-30WW
Power	7W/9W	12W	15W	18W	24W	30W
Dimension	Ø115xH48mm	Ø140xH52mm	Ø170xH52mm	Ø190xH70mm	Ø225xH70mm	Ø225xH70mm
Outcut	Ø90-95mm	Ø120-125mm	Ø150-155mm	Ø170-175mm	Ø195-205mm	Ø195-205mm
Led chips	Samsung/Epistar SMD LED Chips					
Lumens output	90lm/W					
Color temperature	3000K WW; 4000-4500K NW ; 6000-6500K CW					
Input voltage	AC100-240VAC; The low voltage such as DC12V 24V 48V can be customized					
Control gear	Included					
Power factor	>0.6/0.9					
CRI	>82					
IP Grade	IP20 Indoor use only					
Materials	Die-cast aluminum+PC Cover					
Beam angle	90-100°					
Working temperature	-25°C~+50°C					
Certificates	CE RoHS LVD EMC					