


Gimbal Downlight



Grnled




Feature

1. Bridgelux/CREE COB. CRI90
2. Rotation 360°, and pull out 90°
3. Top led driver, free flicker, lifetime > 5 years
4. Emergency kit option
6. Different beam angle option
7. Efficiency > 89%
8. CE RoHS LVD EMC

Feature



Light distribution

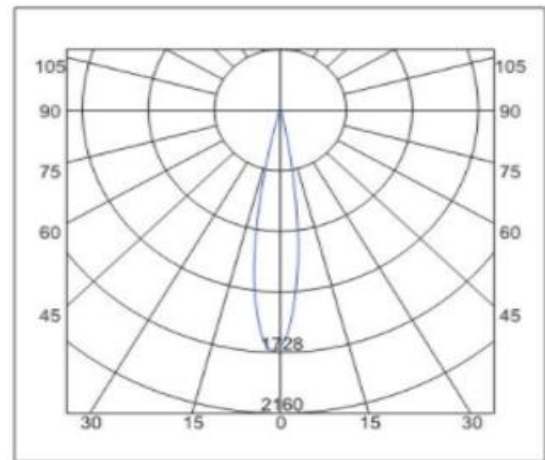

Specification

Model	GR-DL-7WE	GR-DL-12WE	GR-DL-20WE	GR-DL-30WE
Power	7W	10W	20W	30W
Dimension(mm)	Ø90xH100	Ø110xH135	Ø130xH135	Ø165xH175
Outcut(mm)	Ø75	Ø95	Ø115	Ø145
LED Chips brand	Brigelux /CREE			
Lumens	630-650lm	900-950lm	1800-1900lm	2700-2800lm
Color temperature	3000K-6500K			
Input voltage	AC100-240VAC; DC12V 24V 48V can be customized			
Driver	Included. Free flicker			
Power factor	>0.6			
CRI	>90			
Dimmable	No. But Triac/0-10V/DALI dimmable can be available			
Materials	Die-cast aluminum+reflector. White/Black frame options			
Beam angle	15/24/36° (24° is common)			
Working life	50000Hrs			
Standard	Comply with CE RoHS			
Warranty	3-5 Years			
Working temperature	-20°C ~ +50°C			
Installation	Recessed installation			
Remark	Emergency kit available (duration 3 hours for 30% of power)			