


Low voltage deck lighting

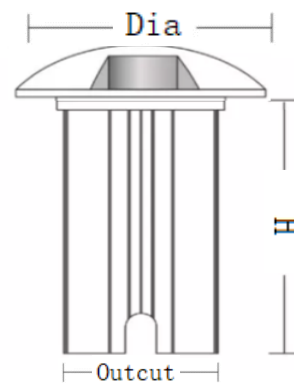

Feature

1. Aluminum /stainless steel body optional.
2. One way/two way/four way optional.
3. LiFud, DONE, GS, Boke, Eagleries driver options etc.
4. Bridgelux high power led chips. 100lm/W
5. Working life up to 50000Hrs.
6. Warm white/white/Green/Blue/Red color optional.

Application



Specification

Model	GR-GL-1WB42	GR-GL-1WB52	GR-GL-1WB62
Power	1W	1W	1W
Dimension(mm)	D42*H82	D52*H95	D62*H95
Outcut(mm)	40mm	48mm	57mm
LED Chips brand	Bridgelux high power		
Lumens	100lm/W		
Color temperature	3000K-6500K, Red/Blue/Green Optional		
Input voltage	DC12V-24V		
Driver	Included.		
Power factor	>0.6		
CRI	80%		
Dimmable	No. But Triac/0-10V/DALI dimmable can be available		
Materials	Die-cast aluminum/Stainless steel optional		
Beam angle	120°		
Working life	50000Hrs		
Standard	Comply with CE RoHS		
Warranty	2-3Years		
Working temperature	-20°C ~ +50°C		
Installation	Recessed installation		
IP Grade	IP66 Waterproof		