

# Outdoor Led Wall Light

**Grnled**




## Feature


1. Isolated driver, stable & duration.
2. IP65 Protection grade, Anti-moisture.
3. Input voltage AC100-240VAC or DC12V 24V options
4. CREE/Bridgelux COB, CRI90, high lumens output
5. Free flicker.
6. Efficiency >86%



## Application

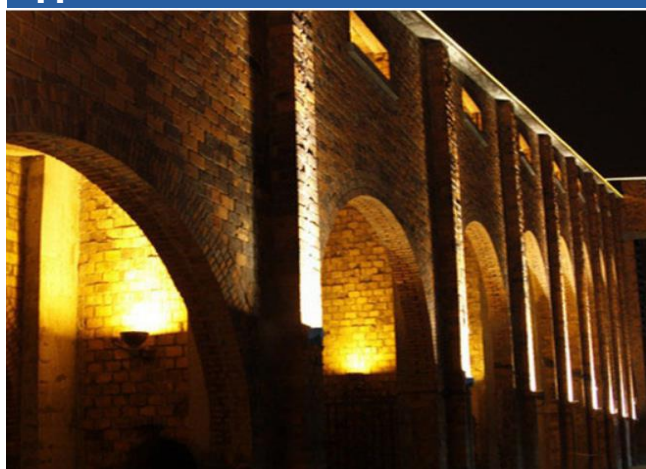

## Dimension

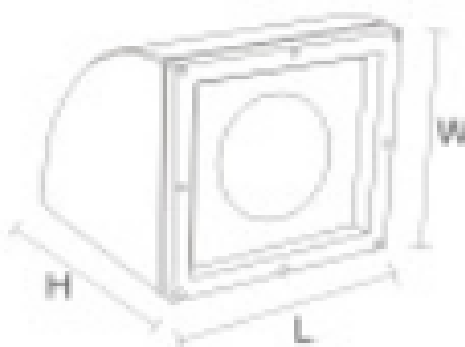

## Spacification

Model	GR-WML-10WF	GR-WML-20WF	GR-WML-30WF	GR-WML-50WF
Power	10W	20W	30W	50W
Dimension(mm)	L90*W90mm	L120*W120mm	L150*W150mm	L220*W220mm
Outcut(mm)	/			
LED Chips brand	CREE/Bridgelux COB			
Lumens	90-100lm/W			
Color temperature	3000K-6500K			
Input voltage	AC100-240VAC; DC12V 24V 48V can be customized			
Driver	Included. Free flicker			
Power factor	>0.6			
CRI	>80			
Dimmable	No			
Materials	Die-cast aluminum +glass cover			
Beam angle	30/45/60°			
Working life	50000Hrs			
Standard	Comply with CE RoHS			
Warranty	3-5Years			
Working temperature	-20°C ~ +50°C			
Installation	Wall mounted			
Remark	Just email to us if have any other requirements or questions			