


# Recessed Linear Spotlights

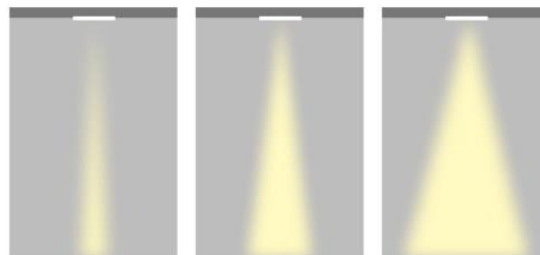


15°                      30°                      45°

## Feature

1. Long lifespan. Lifetime > 50000 Hrs.
2. High lumens output. 90lm/W output
3. LiFud, DONE, GS, Boke, Eagleries driver options etc.
4. Osram SMD Chip, CRI80
5. Triac/0-10V/DALI Dimmable option.
6. Recessed installation.
7. Warranty 2-3 Years optional.
8. Comply with CE RoHS.
9. Emergency kit available.

## Application

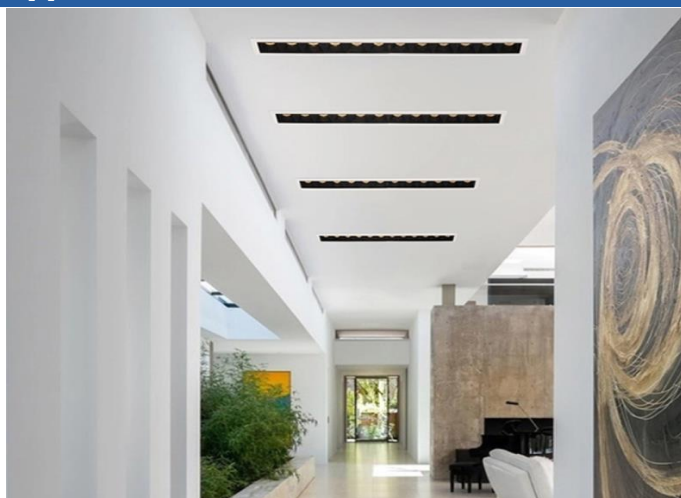

## Specification

Model	GR-LS-3*2W	GR-LS-5*2W	GR-LS-10*2W	GR-LS-15*2W
Power	6W	10W	20W	30W
Dimension(mm)	106*46mm	148*46mm	280*46mm	414*46mm
Outcut	100*35mm	138*35mm	270*35mm	400*35mm
LED Chips brand	Osram SMD3030 Chips			
Lumens	540lm	900lm	1800lm	2700lm
Color temperature	3000K-6500K			
Input voltage	AC100-240VAC; DC12V 24V 48V can be customized			
Driver	Included. Free flicker			
Power factor	>0.6			
CRI	80%			
Dimmable	No. But Triac/0-10V/DALI dimmable can be available			
Materials	Die-cast aluminum+reflector. White/Black frame options			
Beam angle	15/30/45°			
Working life	50000Hrs			
Standard	Comply with CE RoHS			
Warranty	2-3 Years			
Working temperature	-20°C ~ +50°C			
Installation	Recessed installation			
Remark	Emergency kit available( duration 3hours for 30% of power)			