

Waterproof Slim Surface Ceiling Light

Grnled




Feature

1. Waterproof structure design.
2. Anti-UV Materials, avoiding yellow changes.
3. Top led driver, free flicker, lifetime > 5 years
4. Epistar SMD LED Chips, high lumens output
5. White/black/gold/silver frame options
6. Efficiency > 87%



Dimension drawing

Light distribution

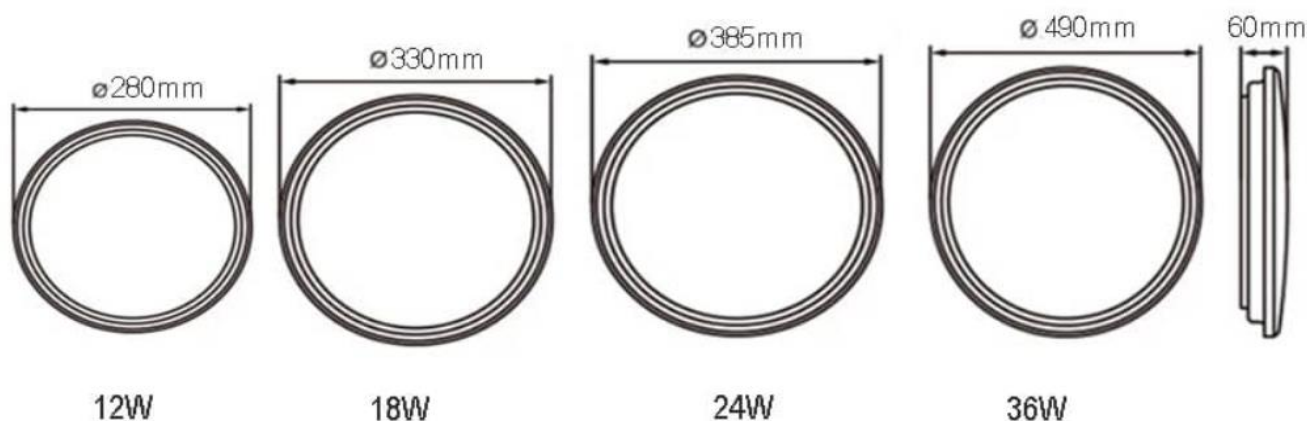

Specification

Model	GR-CD-12WE	GR-CD-18WE	GR-CD-24WE	GR-CD-36WE
Power	12W	18W	24W	36W
Dimension(mm)	Ø280xH60	Ø330xH60	Ø385xH60	Ø490xH60
Outcut(mm)	/			
LED Chips brand	Epistar SMD LED chips			
Lumens	85-90lm/W			
Color temperature	3000K-6500K			
Input voltage	AC100-240VAC; DC12V 24V 48V can be customized			
Driver	Included. Free flicker			
Power factor	>0.6/0.9			
CRI	>80			
Dimmable	No.			
Materials	ABS bottom+PC Cover, White/black/gold/silver frame options			
Beam angle	120°			
Working life	50000Hrs			
Standard	Comply with CE RoHS			
Warranty	3Years			
Working temperature	-20°C ~ +50°C			
Installation	Surface installation			
IP Grade	IP54 Waterproof			