
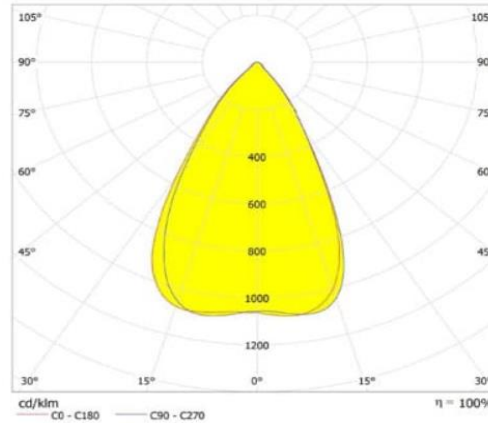


W Series COB Led Downlight



Feature

1. Anti-glare design, UGR<19.
2. Top led driver, isolated, Free flicker.
3. Lifetime>5years at least
4. Bridgelux COB, CRI90

Option

1. Emergency kits (1- 3hours duration)
2. Triac/0-10V/DALI dimmable

Specification

Model	GR-DL-7WW	GR-DL-9WW	GR-DL-12WW	GR-DL-15WW	GR-DL-20WW	GR-DL-30WW
Power	7W	9W	12W	15W	20W	30W
Dimension	Ø100×H60mm	Ø120×H70mm	Ø145×H80mm	Ø170×H90mm	Ø190×H100mm	Ø220×H110mm
Outcut	Ø80-85mm	Ø95-105mm	Ø120-125mm	Ø150-155mm	Ø170-175mm	Ø195-200mm
Led chips	Bridgelux COB					
Lumens output	90lm/W					
Color temperature	3000K WW; 4000-4500K NW ; 6000-6500K CW; The yellow color such as 2000-2500K can be customized					
Input voltage	AC100-240VAC; The low voltage such as DC12V 24V 48V can be customized					
Control gear	Included					
Power factor	>0.6/0.9					
CRI	>90					
IP Grade	IP20 Indoor use only					
Materials	Die-cast aluminum					
Beam angle	60°					
Working temperature	-25°C~+50°C					
Certificates	CE RoHS LVD EMC					