



Backlit 600x600mm LED Panel Light

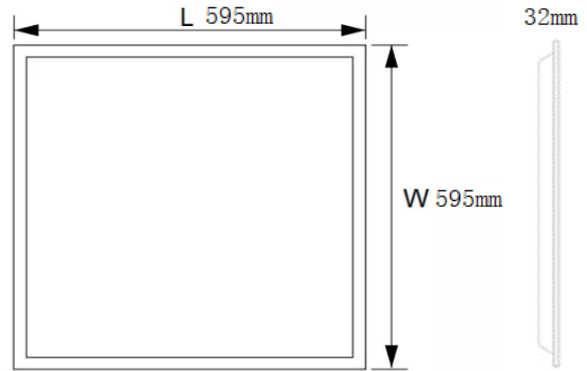

Feature

1. Long lifespan. Lifetime > 50000 Hrs.
2. High lumens output. 100-120lm/W output
3. LiFud, DONE, GS, Boke, Eagleries driver options etc.
4. Anti-UV LGP, avoiding any turn yellows.
5. Triac/0-10V/DALI Dimmable option.
6. Surface/recessed/suspension installation available.
7. Warranty 2-3 Years optional.
8. CE RoHS LVD EMC Approval.
9. AC110V 220V DC12V 24V 48V Input option
10. Power 48W can be done if needed.
11. Emergency kit options.

Light Distribution curve

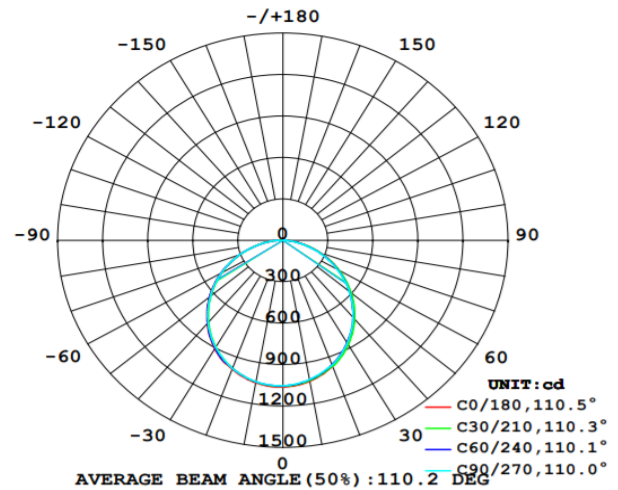

Specification

Model	GR-PL6060-40WD
Power	40W
Dimension	595*595*32mm
LED Chips Quantities	48pcs
LED Chips brand	Epistar SMD 2835
Lumens	4000lm
Color temperature	3000K-6500K
Input voltage	AC100-240VAC; DC12V 24V 48V can be customized
Output	38.2DC 1000mA
Power factor	>0.9
CRI	80%
Dimmable	No. But Triac/0-10V/DALI dimmable can be available
Materials	Die-cast aluminum+diffuser plate. White/Silver frame options
Beam angle	110-120°
UGR	<20
Certificates	CE RoHS LVD EMC
Warranty	2-3 Years
Remark	Emergency kit available(duration 3hours for power 12W-18W)