


# GR-HB-200WL Linear High Bay Lights



## Dimension




Unit:mm

## Description&Feature

LED high bay light,delivers a superior LED alternative that's up to 60% more energy efficient than the conventional HPS,Metal halide bay light retrofits.Surface/Suspension installation options. It is also ideal for all industrial lighting applications as well as public indoor spaces,such as warehouses, bus stations, Mine,Factories.,etc. Its lifetime can be up to 10years. The other extra function such as dimming/ emergency backup also can be available. Different beam angle options.

## Light distribution Curve

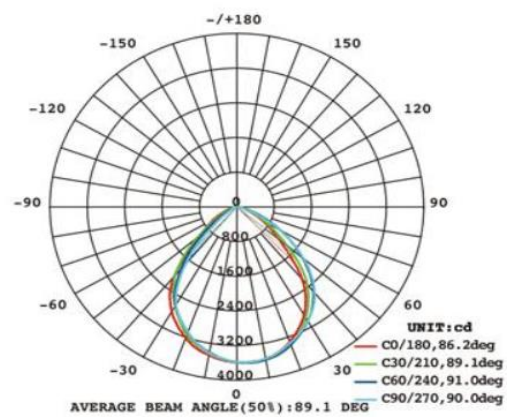

## Spacification

|                     |   |
|---------------------|---|
| Model               | GR-HB-200WL   |
| Dimension(mm)       | L1089*W115mm  |
| Outcut              | /   |
| Power               | 200W±5%   |
| LED Chips brand     | Philips/Osram/Bridgelux SMD3030 224PCS                    |
| Lumens              | 22000-28000lm   |
| Color temperature   | 3000K/4000K-4500K/6000K-6500K                             |
| Driver              | Isolated driver/Meanwell/Philips/DONE Brand driver        |
| Input voltage       | 100-240VAC / 220-240VAC 50/60Hz                           |
| Power factor        | >0.95   |
| CRI                 | >80   |
| SDCM                | <5  |
| Working life        | >50000Hrs   |
| Efficiency          | >90%  |
| Materials           | Die-cast aluminum+PC                                      |
| Beam angle          | 90°   |
| THD                 | <10%  |
| IP Grade            | IP65 waterproof   |
| Dimmable            | No. but it is ok to do Triac/0-10V/DALI Dimming if needed |
| Working temperature | -30°C~+55°C   |
| Package             | 122*15*15CM/PCS/CTNS                                      |
| Standard            | CE LVD EMC RoHs   |
| Warranty            | 3/5Years options  |