

Led Track Lighting



Feature

1. Long lifespan. Lifetime > 50,000 Hrs.
2. High lumens output. 90-100lm/W output
3. Top brand driver. LiFud, DONE, Eagleries, GS etc. Free flicker.
4. Bridgelux COB, CRI90.
5. Triac/0-10V/DALI Dimmable option.
6. Different track heads-2phases, 3phases options.
7. Warranty 2-5 Years optional.
8. CE RoHS LVD EMC Approval.
9. AC110V 220V DC12V 24V 48V Input option.
10. Different beam angle 15/24/38° options.

High CRI90

Beam angle



CRI:70


CRI:80

CRI: 90

Note:

CRI refers to the ability to express the original color of the illuminated object. The larger the value, the higher the display index and the better the true color of the object can be restored. We only use the high quality Bridgelux COB with CRI90-92 to do track lighting.

15° beam angle suitable for accent lighting
 24° suitable for wall washer for painting etc.
 38° is for general lighting.

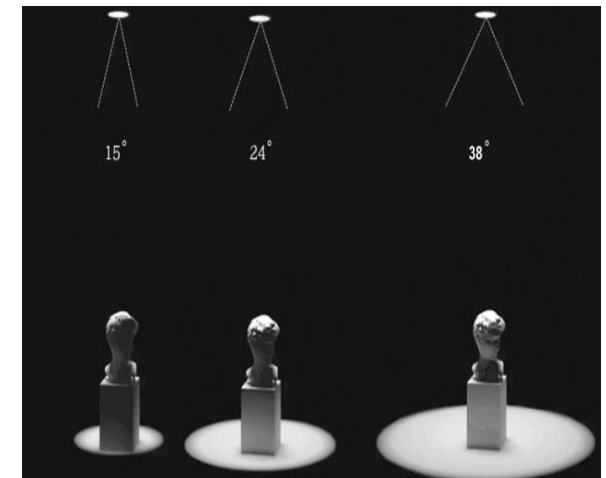

Led Track Lighting



Track heads option



2 wires track system
(single phase)
White,Black,Silver



3 wires adaptor
White,Black,Silver




4wires adaptor
(3 circuits/three phase) B
White,Black,Silver

Accessories-Track optional



2Wires

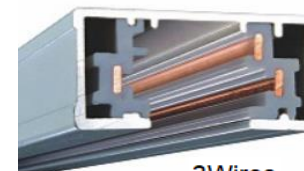

3Wires



4Wires

Specification

	GR-TL-20WB	GR-TL-30WB
Model	GR-TL-20WB	GR-TL-30WB
Power	20W	30W
Dimension	D100*L160*H230mm	
LED Chips Quantities	1PCS	
LED Chips brand	Bridgelux COB	
Lumens output	1800lm	2700lm
Color temperature	3000K WW; 4000-4500K NW ; 6000-6500K CW; The yellow color such as 2000-2500K can be customized	
Input voltage	AC100-240VAC; The low voltage such as DC12V 24V 48V can be customized	
Driver	Included,isolated,free flicker,lifetime>5years.	
Power factor	>0.6/0.9	
CRI	>90	
IP Grade	IP20 Indoor use only	
Materials	Die-cast aluminum.Black/white housing optional	
Beam angle	15/24/38°	
Working temperature	-25°C~+50°C	
Warranty	2-5Years	
Certificates	CE RoHS LVD EMC	
Remark	0-10V/Triac dimmable /DALI dimmable can be customized	